


Mode 1
CW Legacy

Instal Signals
Y1, X1, X2


Instal ST at 2 Locations

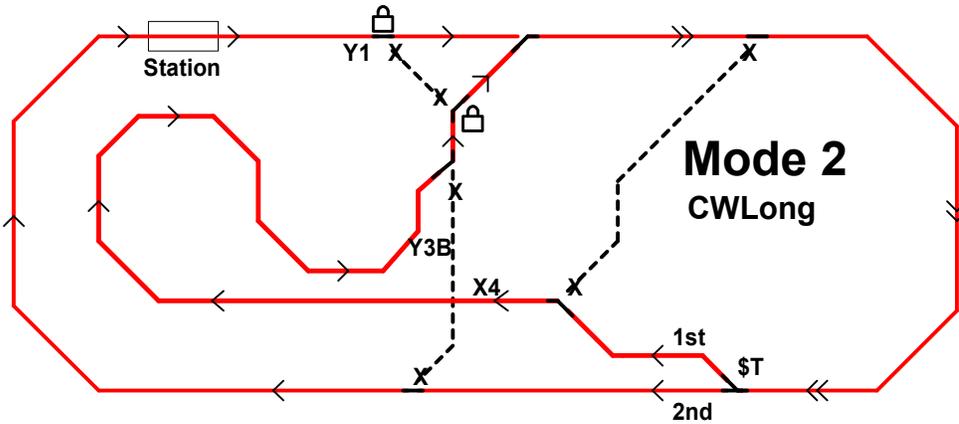

Mode 2
CW Long

Instal Signals
Y1, Y3B, X4


Instal \$T at 1 Location

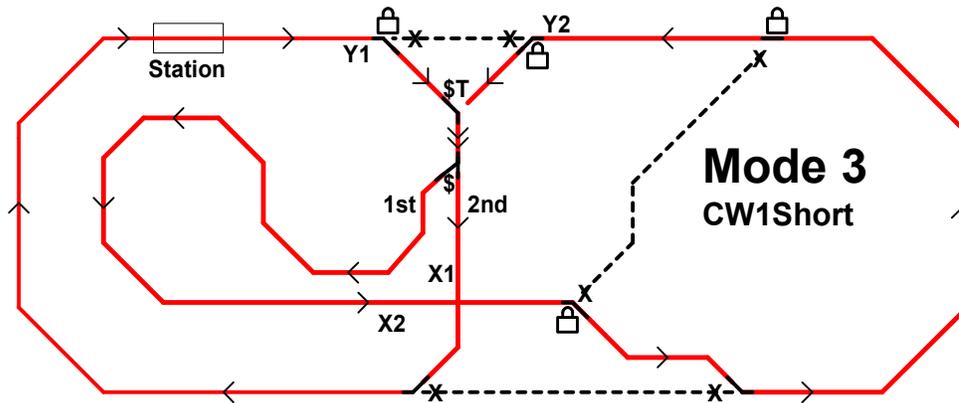

Mode 3
CW 1 Short

Instal Signals
Y1, Y2, X1, X2

Instal \$T at 1 Location

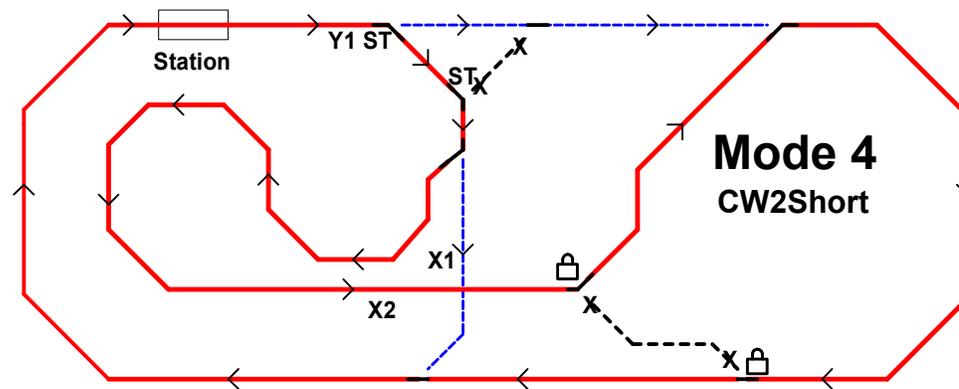

Mode 4
CW 2 Short

Instal Signals
Y1, X1, X2

Instal ST at 2 Locations

ST: Switch Stand locations that permit optional routing.

\$/ST: Switch must be thrown by the engineer selecting route 1 first pass and route 2 second pass.

◊ = Permissible Route Travel Directions

≡ = Mainline route section Travelled Twice

--- = Allowed Optional Route. Turnout must be restored to Mainline.

X---X = Closed Track, Do Not Enter

🔒 = Turnout locked in position, no Switch Stand.

Title		CW Modes 1- 4	
Author		G. Slobodzian Kitsap Live Steamers	
File	ents\KLS\Signal System\Wiring\CWroutes_1_4.dsn		Document
Revision	Date	Sheets	
1.1	3/19/21	1 of 1	